
Apex Enclosure

Assembly Instructions

COMPULICKS



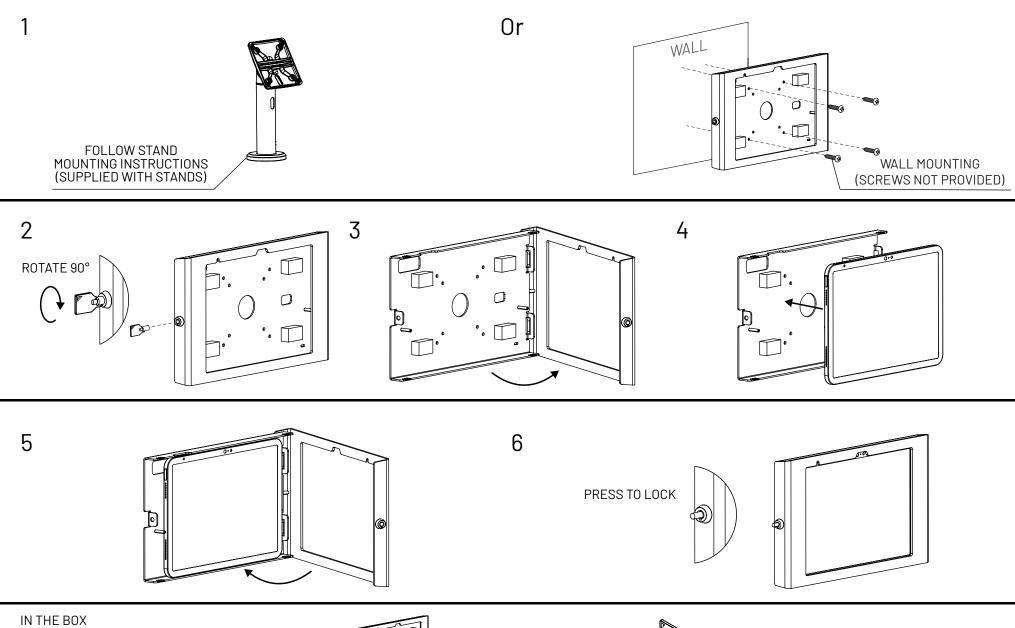

Apex Enclosure




Keys


Swell Enclosure


Assembly Instructions


COMPULICKS

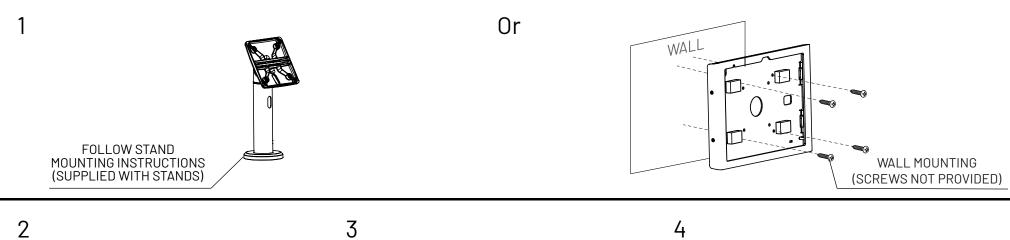


2











IN THE BOX




(B) (B) (B)



M3x10mm tamper proof screws www.compulocks.com|online@maclocks.com|+1800-948-0344



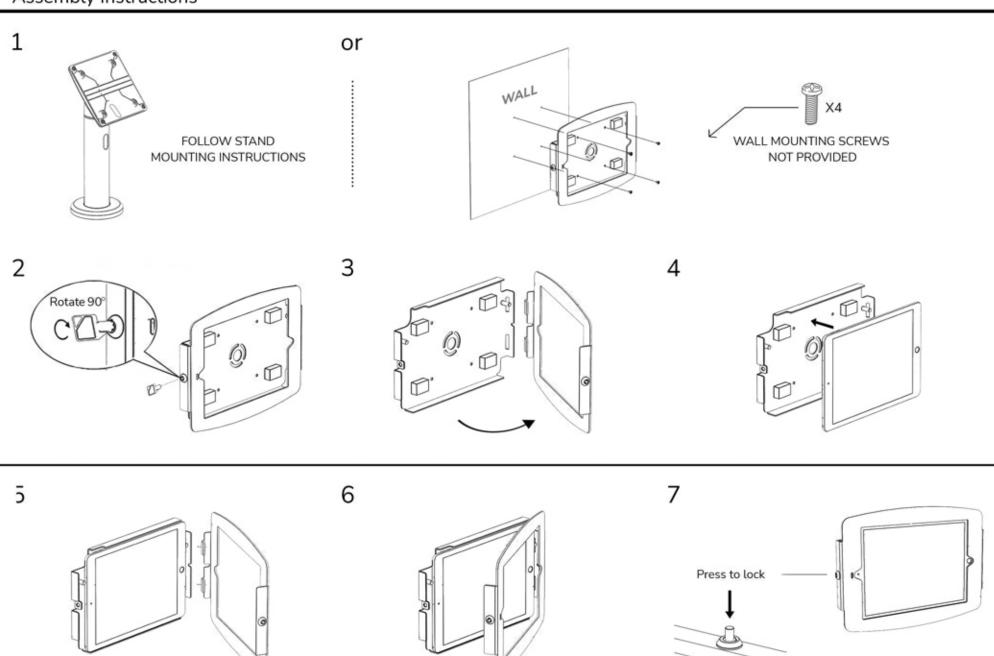


COMPULICKS

Through Stand Cable Assembly

1

SCREW THE BOTTOM PLATE TO THE WALL / COUNTER WITH PHILLIPS ROUND HEAD SCREWS - TYPE 10 X 1 ½" (PROVIDED).



NOTE: IN A WOOD STUD INSTALATION ENSURE AT LEAST TWO VERTICALLY ALIGNED SCREWS ARE SECURED INTO THE STUD. 2


REMOVE FRONT COVER.

USE T-20 TORX


WRENCH (PROVIDED)

TO REMOVE M4 X 10mm

TORX FLAT HEAD SCREWS




ROUTE CHARGING CABLE THROUGH MOUNT AS SHOWN




4

ROUTE CHARGING CABLE THROUGH MOUNT AS SHOWN



5


PLACE BOW MOUNT OVER BOTTOM PLATE
AND INSTALL USING 2 M4 X 10mm
TORX FLAT HEAD SCREWS AND WRENCH (PROVIDED).
INSTALL RUBBER PLUGS.




6

3


ROUTE CHARGING CABLE
THROUGH ENCLOSURE OR VESA MOUNT.
INSTALL TO MOUNT USING M4 X 8mm
PHILLIPS PAN HEAD SCREWS (PROVIDED)



7

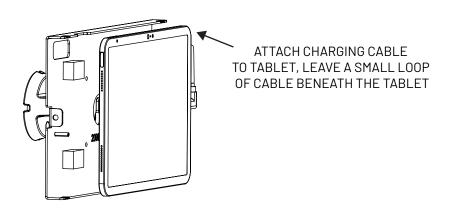


8



INSTALL THE REST OF THE ENCLOSURE OR VESA MOUNT PER THEIR INSTRUCTIONS

Tilt Tension Adjustments



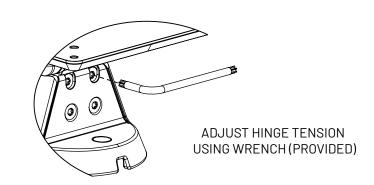

IN THE BOX



Bow Mount



Bottom Plate



Rubber Plugs



10 X 1 ½" Phillips Round Head Screw



M4 X 10mm Torx Flat Head Screw



M4 X 8mm Phillips Pan Head Screw



T20 TORX L-Wrench