



Wall Mounting

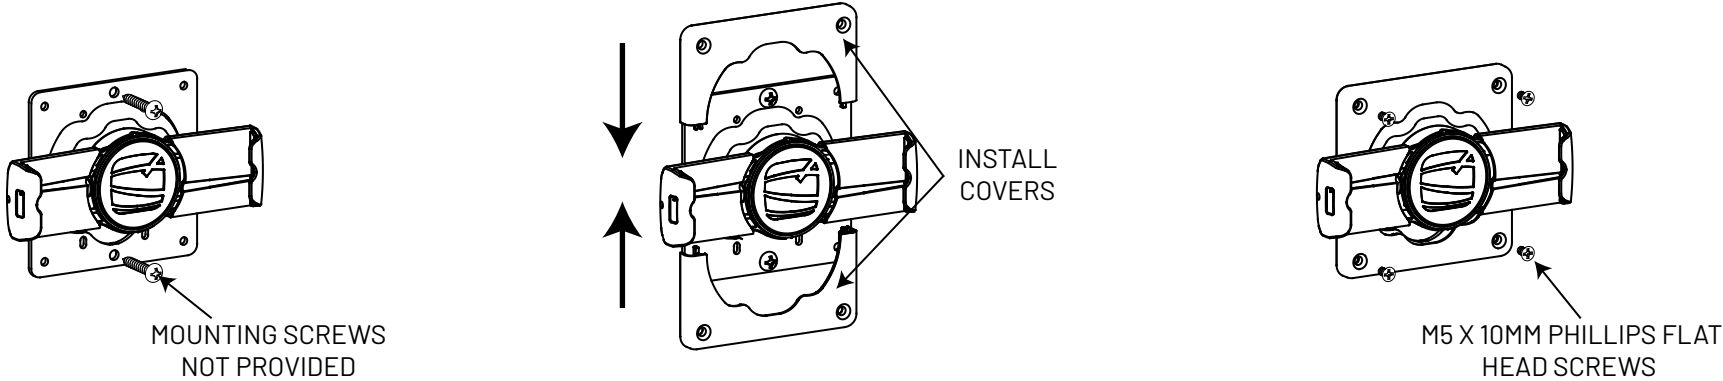


J-Box Mounting

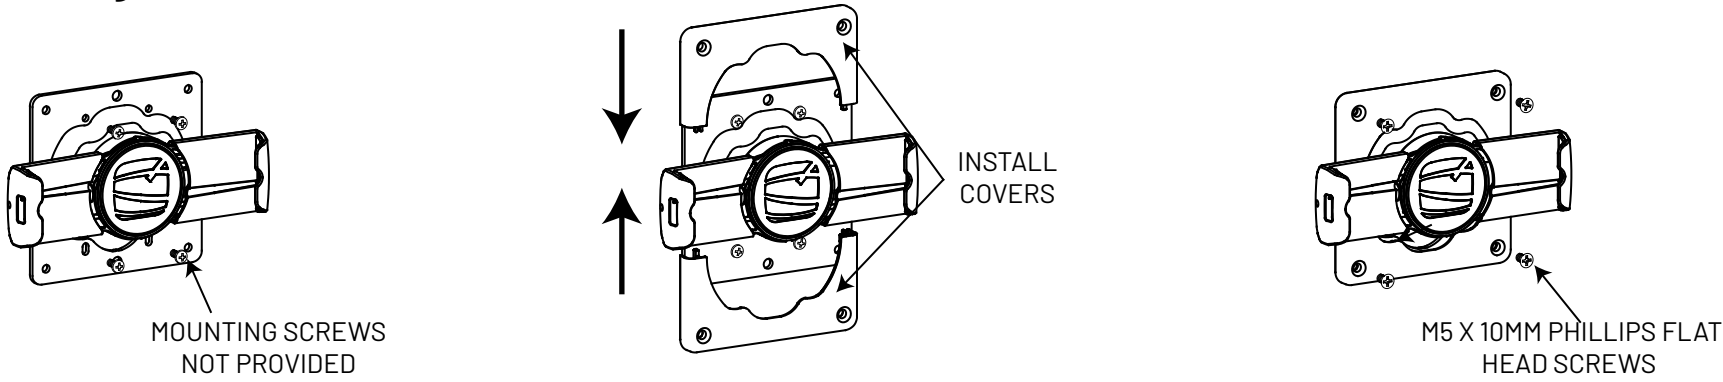


100mm Vesa Mounting



Minimum and Maximum Opening of Mount

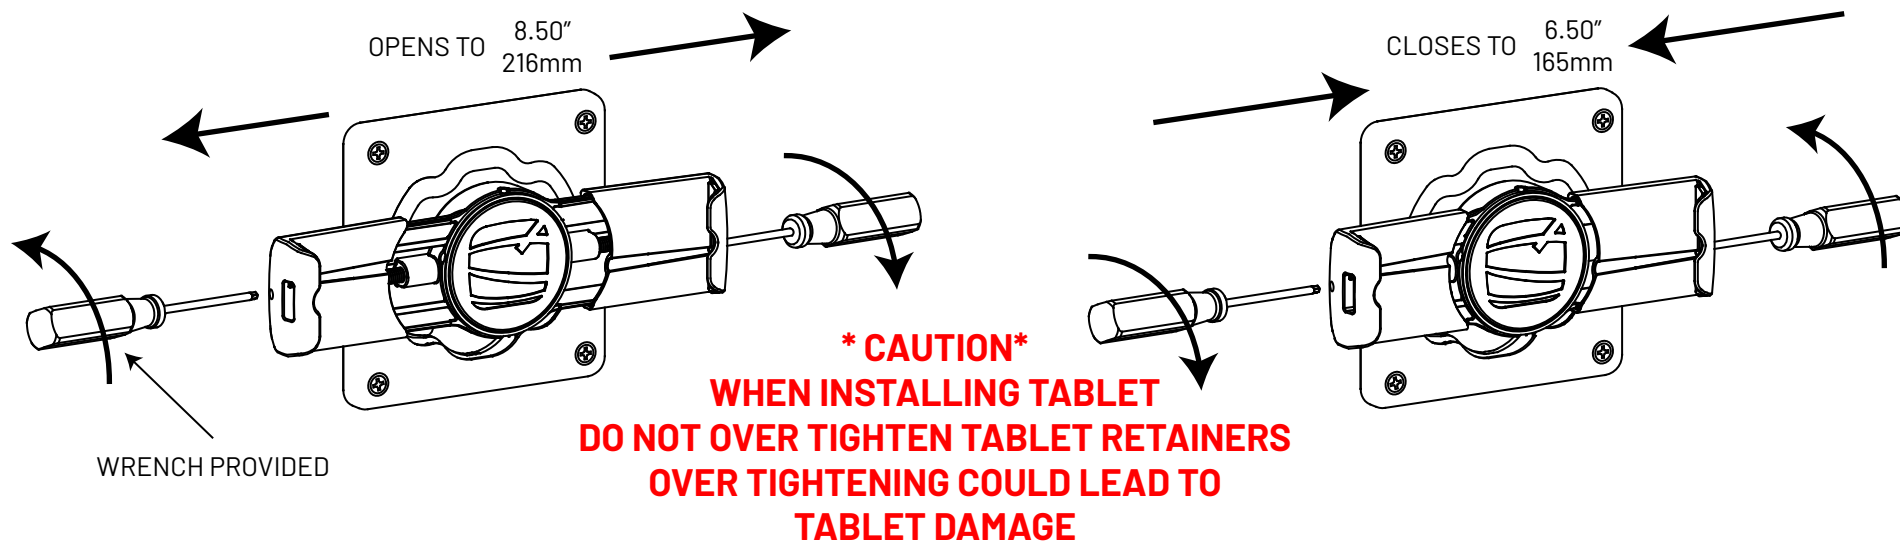


Tablet Portrait Installation

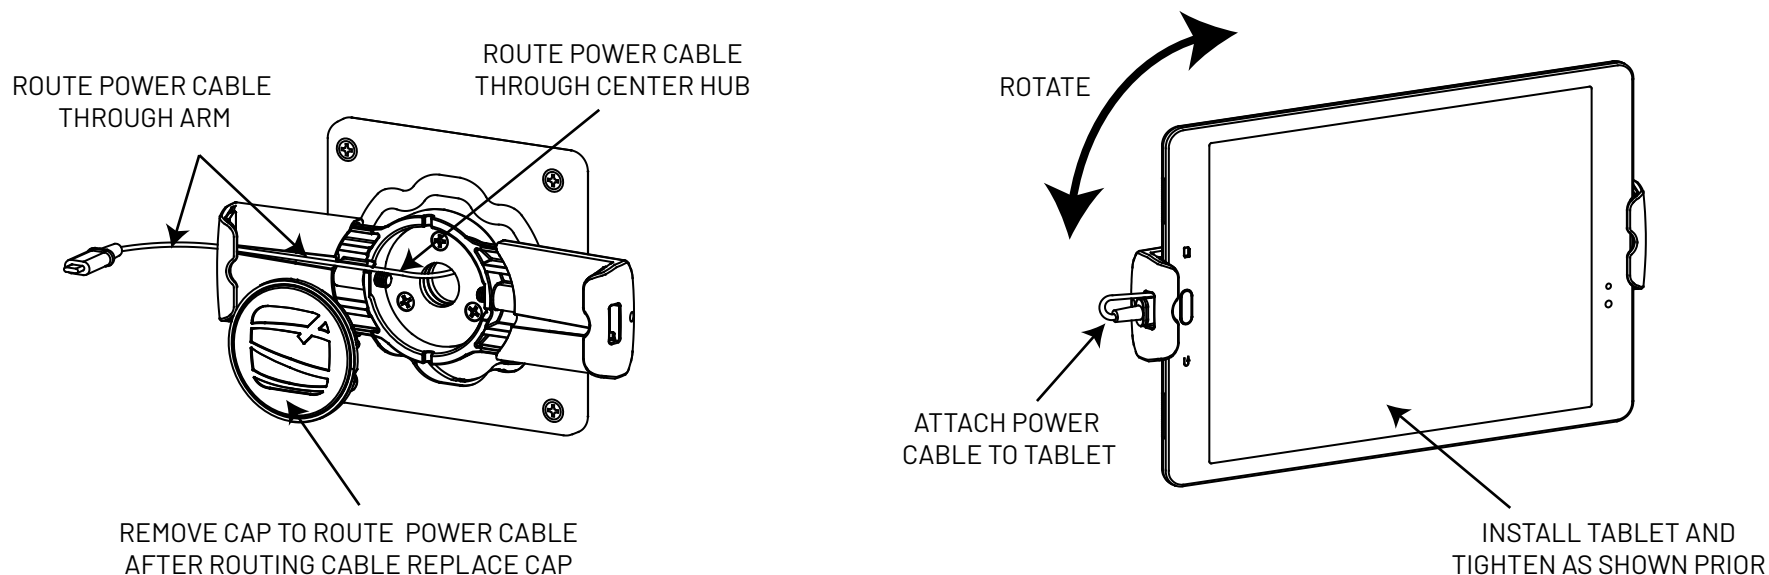

Tablet Landscape Installation


ROUTE POWER CABLE
THROUGH CENTER HUB

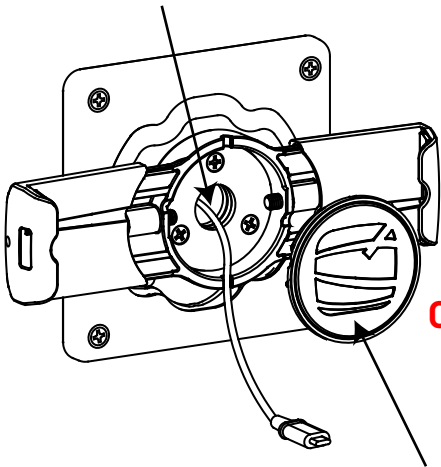

REMOVE CAP TO ROUTE POWER CABLE
AFTER ROUTING CABLE REPLACE CAP


*** CAUTION***
WHEN INSTALLING TABLET
DO NOT OVER TIGHTEN
TABLET RETAINERS
OVER TIGHTENING COULD LEAD TO
TABLET DAMAGE

ROTATE

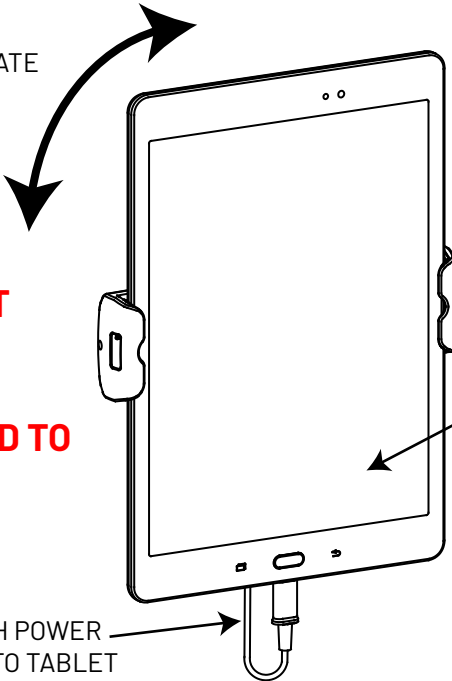


INSTALL TABLET AND
TIGHTEN AS SHOWN PRIOR


IN THE BOX



Hardware Kit




Cling VESA 100mm



Covers


1

TIGHTEN VESA MOUNTING
PLATE AT 90°

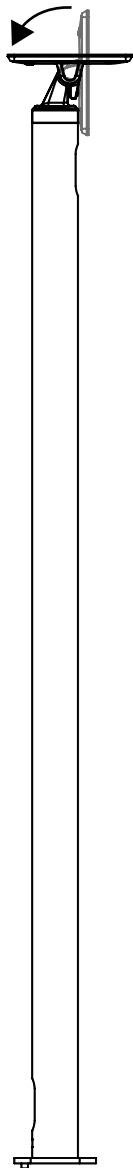


2

TURN STAND ONTO VESA
MOUNTING PLATE AND PLACE ON FLAT SURFACE.
PLACE BOTTOM PLATE
AND ALIGN WITH HOLE USING LOCATOR PIN

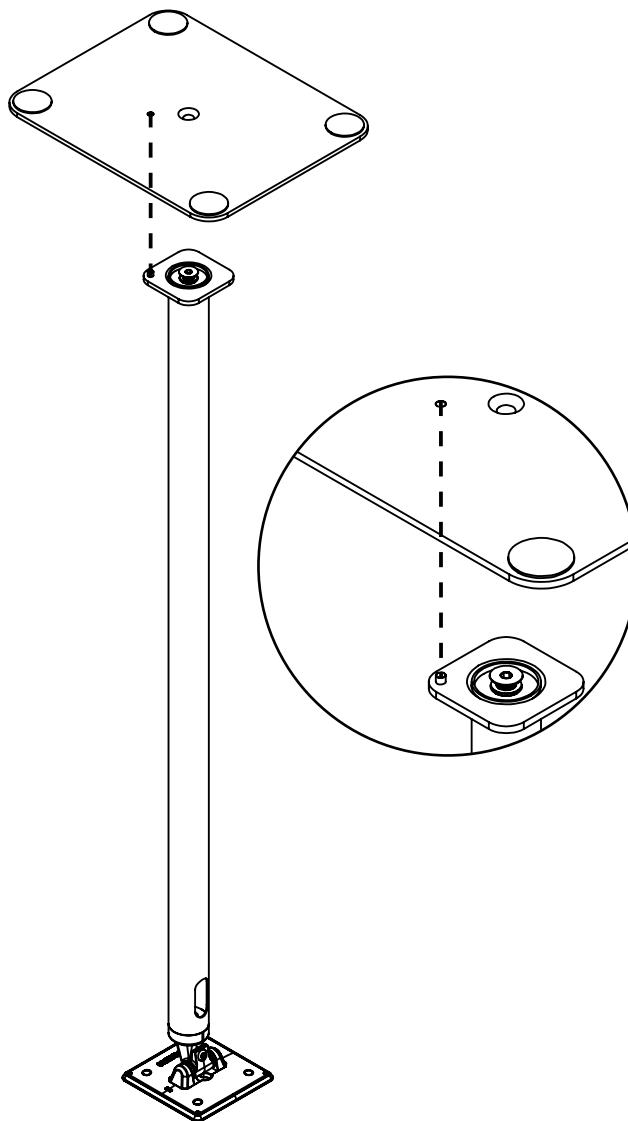


3


INSTALL THE BOTTOM PLATE USING M10 X 25mm
CONICAL ALLEN SCREW (PROVIDED)
AND 6mm ALLEN WRENCH (PROVIDED)

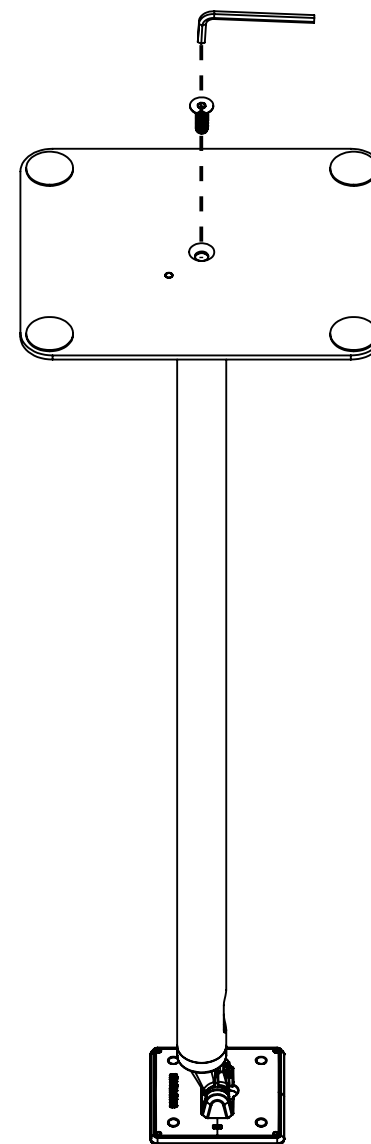


4 Free Standing or Floor Mounting

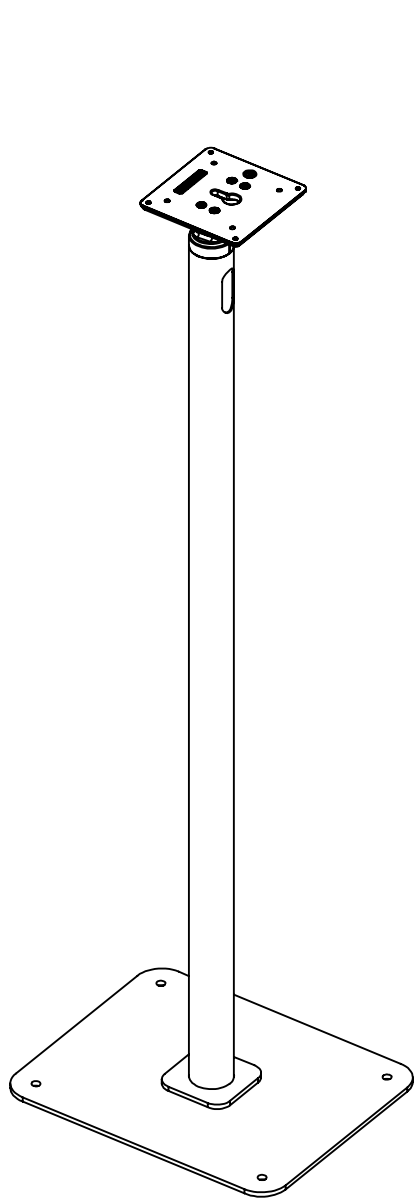

REMOVE RUBBER PLUGS

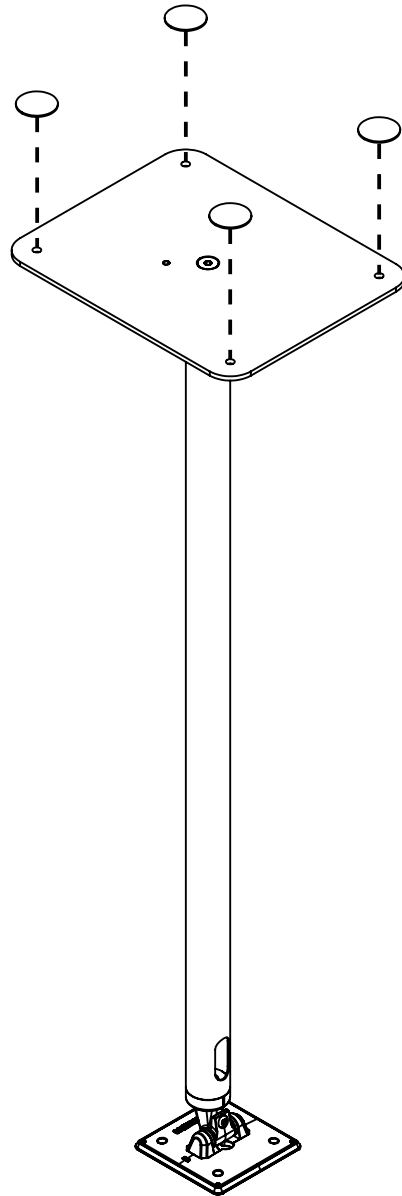


SCREW BOTTOM PLATE TO THE FLOOR
(SCREWS NOT PROVIDED)

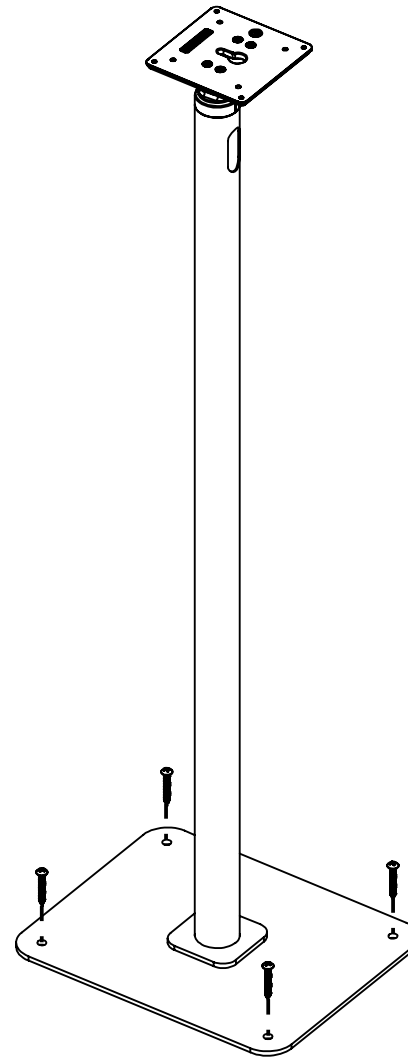

5

ROUTE CHARGING CABLE
THROUGH THE STAND AS SHOWN

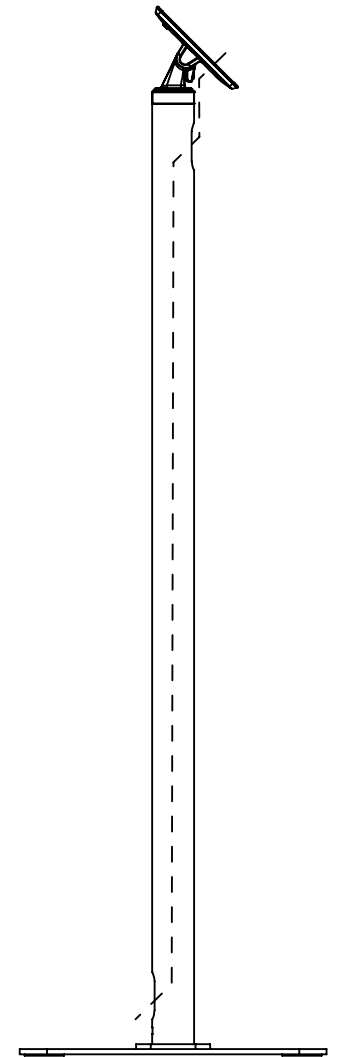

- 6


INSTALL ENCLOSURE/VESA MOUNT
TO STAND USING M4 X 8mm
PHILLIPS PAN HEAD SCREWS (PROVIDED)
- 7


INSTALL THE ENCLOSURE TOP
PLATE/VESA MOUNT PER
THEIR INSTRUCTIONS

Tilt Tension
Adjustments

In The Box

ADJUST HINGE
TENSION USING
T30 TORX
L-WRENCH
(PROVIDED)


- 

M4 X 8mm
Phillips Pan Head
Screws
- 


T30 TORX L-Wrench

- 


M10 X 25mm
Conical Allen
Screw

- 

6mm Allen Wrench



Bottom Plate



Swift Pole